

# Multiple Installation Methods

Meet Various Needs for Stress-Free Bathing



### Choose one of three installation methods:

1. Suction Cup Style: Suitable for smooth glass or tiles; wet the suction cups for better adhesion.
2. Adhesive Style: This can be applied to various smooth surfaces. Remove the suction cups when using this method, clean thoroughly, and ensure there is no water or dust.
3. Screw Style: Suitable for plaster walls, cement walls, brick walls, etc. Requires drilling and screw installation.



### Suction Cup Style

1. Insert the three suction cups into the corresponding holes.
2. Press firmly onto clean and smooth tiles or glass surfaces. Wetting the surface can enhance adhesion.



### Hook type Style

1. Hang the hook in the appropriate position to use



### Installation method

1. Insert the plastic expansion strip into the drilling hole and rotate it to fix it.
2. Align the bracket with the holes and screw it in.

# Product Warranty Card

Product Model: \_\_\_\_\_ Product Number: \_\_\_\_\_

Manufacturing Date: \_\_\_\_\_ Purchase Date: \_\_\_\_\_

Warranty Coverage: \_\_\_\_\_

---



---



---

### Friendly Reminder:

1. Use and store within the temperature range of 0-60°C.
2. Minors should use this product under adult supervision.
3. In case of product malfunction or damage, discontinue use, contact the dealer and the manufacturer, and do not disassemble it yourself.
4. If stored for more than 3 months, please recharge regularly to prevent battery depletion.

Professionalism, Dedication, and Concentration  
Service Excellence, Sincere Service for Your Satisfaction!



# Installation and User Manual

Please read carefully before use



# Electric Portable Shower Instruction manual

Thank you for choosing our product!  
 This product is the result of our company's new design concept, crafted to deliver high-quality excellence.  
 To make the most of this product, please read the instruction manual carefully.

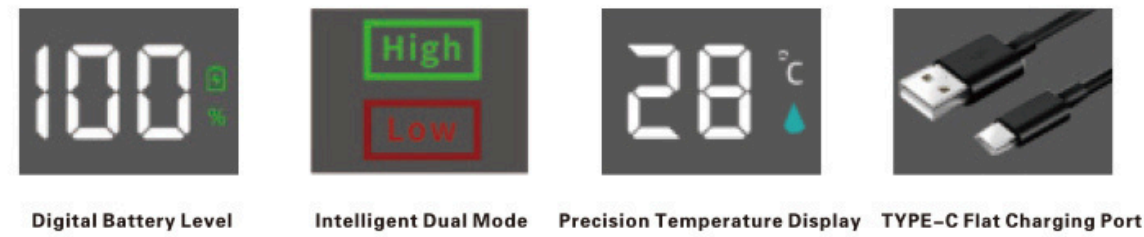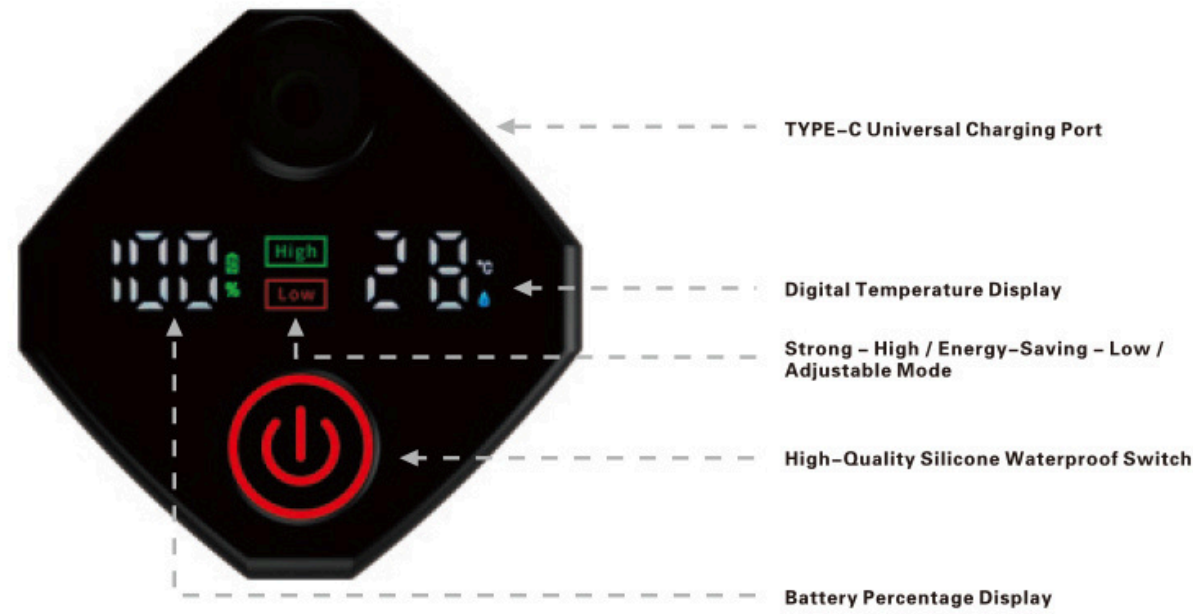

**Model:** PJ-YT20  
**Input Voltage:** DC 5V  
**Maximum Flow Rate:** 8L/minute  
**Water Outlet Diameter:** 4-threaded connection  
**Inspected:** Passed  
**Inspector:** 02

The bottom is removable for easy cleaning.



Upon receiving this product, please check if all components in the packaging are complete.  
 If any parts are missing, please contact the dealer.

## Installation Steps:


**1** Unscrew the cap at the end of the hose (screw one end onto the showerhead and the other end onto the device).



**2** Submerge it in warm water (water temperature should not exceed 60° C). Wait for a few seconds until the machine expels air bubbles. Long-press the power button for 2-3 seconds to turn it on/off.



**3** Before turning on the machine, ensure the showerhead button is in the open position. Push it back and forth to open and close. Use the knob to control the water flow (refer to the actual product, as this illustration is for reference only).

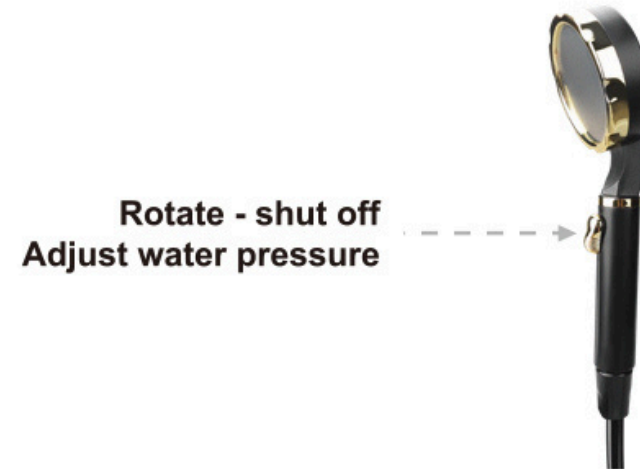

### Power On:

Press and hold the power button for 2-3 seconds to turn the machine on. Press and hold for 2-3 seconds again to turn it off.

### Switching between Strong - High and Energy-Saving - Low Modes:


After turning it on, the default mode is Strong (High), indicated by a green button light and "Strong High" is displayed in the middle of the panel. Press it once to switch to the Energy-Saving (Low) mode. This mode is indicated by a red button light and "Energy-Saving Low" displayed in the middle of the panel.

### Operational Guidelines:

Prepare warm water not exceeding 60 degrees in advance; the ideal bathing temperature is around 40 degrees. Submerge the main unit in water, ensuring it is fully immersed. After air bubbles are expelled from the main unit, press the power button to start. If the water level inside the container is lower than the black position at the bottom of the main unit, please turn off the main unit promptly to prevent overheating.


## Charging Instructions:

**1** Manually open the silicone waterproof cover on the side of the machine for charging. Close the silicone waterproof cover after charging is complete.

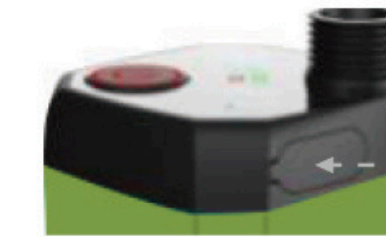

Open Charging Port Here

**2** Use a universal Type-C interface charging cable with a charging power of approximately 10W. Charging will stop automatically when the panel displays 100%, and it will not damage the machine.

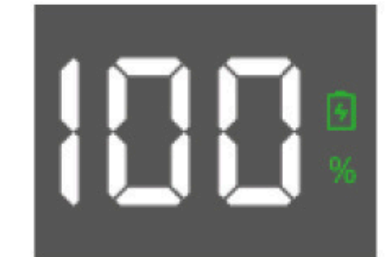

You can use a mobile phone charger or a portable power bank for charging.



Name	Portable Shower Unit
Operating Voltage	DC 3.7v
Charging Voltage	DC 5v
Charging Power	10W
Usage Scenarios	Indoor and outdoor showers, watering plants, car washing, pet bathing, etc.